

















### III – Operating principle

#### Keyboard presentation

When being switched on, "measurement screen" is displayed. From this screen, the operator has access to three others screens by pressing  on keyboard; return to measurement screen is obtained by activating .



- ① ② ③ **Function keys**  Directly associated with texts to displayed shown above on display, they measurement setting.
- ④ **Key "leaves current screen"** 
- ⑤ **Screen key**  From measurement screens, gives access to other screens
- ⑥ **On/Off key** 

#### Instrument offers 2 groups of screens


##### 1. Screens representing the 3 different modes of measurement



Instantaneous




Average




Relative

##### 2. Configuration screens



Brightness




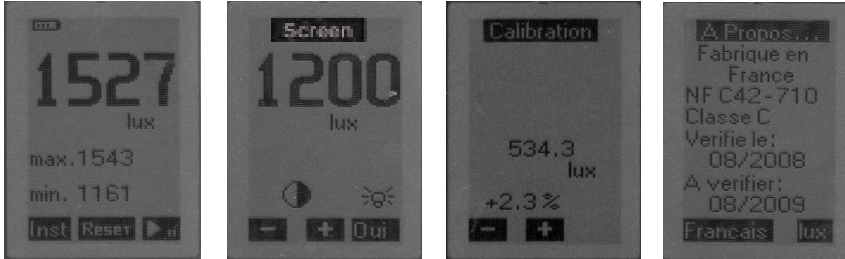
Calibration



Informations



## IV – Setting


Accessible from principal measurement screen by successive pushes on  key , those different screens allow instrument setting. They also inform users.



### Screen control

To optimize display reading, the operator can :

1. Adjust brightness by pressing on  and  function keys.
2. Backlight LCD display for a better reading in a dark place.  
 “No” means backlight is switch off and “Yes” it is switch on.  
 In this last case, battery life is reduced by about 15%.




Brightness

### Calibration


Its role is mainly to recall the calibration conditions including the percentage of modification of profit compared to a nominal calibration.

It is strongly recommended not to change the instrument calibration, this screen is reserved to the manufacturer or laboratory partner.

In case of unwanted push on a key, an alert occurs: **Caution modification!** . Exit via the keys





In case of calibration, please refer to **METROLOGY** Chapter .




Calibration


### About...

Information on origin of manufacture, standard references of the instrument and dates of last and next audits..



By Pressing  and  keys you can choose language : French or English.



About – English



About - French

A press on  or  keys allows the choice measurement unit : Lux or Footcandle.

Note : unit, lux or fc is independent of the used language.

## V – During measurement

### Range

The digital processing of the instrument avoids for users choice of a range of measurement, **LX100** instrument displays results of measurement in lux or fc on all of its dynamics. To cover the whole field, the screen automatically presents the different formats and units.






Lux mode



Footcandle mode

### Illuminance

From the start, the instrument measures and displays twice a second the instantaneous value of illuminance expressed in Lux or fc. This value gives information to users about illuminance local conditions.

- Min. and max. values completes the screen.
- User can at any time by pressing the keys :
  -  : Reset minimum and maximum values
  -  : Enable pause
  -  : Continue measurement




Illuminance

### Averaged illuminance





#### Measurement principle :

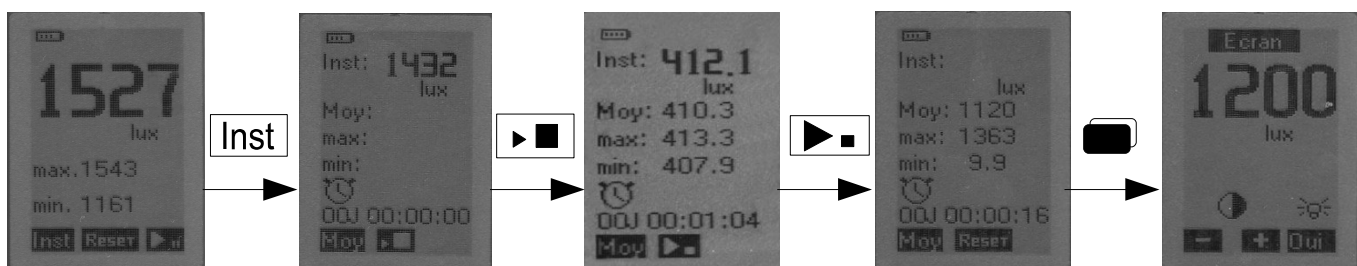From the sampled data, the instrument calculates and displays on the measurement duration :

- Instantaneous value at rate of two displays per second
- Average value
- Max and min values





From the start screen, user accesses to the Moy measurement of illuminance on a period controlled by stopwatch, he proceeds as follows:

- 1 x  Access to **Moy** screen. Measurement is not launched yet.
- 1 x  Launching of the stopwatch, it indicates seconds -minutes-hours-days (max : 03D00H00M00). First values, (**average, max and min**). During measurement, no other function is accessible.
- 1 x  Stop of measurement, "**Reset**" is displayed.
- 1 x  In case of poor readability, user can at this moment modify brightness and/or activate backlight.




**New measurement**


After recording results in his folder, user can launch a new measurement, he proceeds as follows :

1x **Reset** : a sign RESET ? alerts the user of the future reset of memory backup. In case of change of mind, pressing  or  inhibits the action.

2x **Reset** : Memory is erasing , visualized by the progress bar. Memory is erased, the operator can launch a new measurement.



Reset ?



Erased data

**Stop of the instrument**

In case of stop of the instrument, intentionally or accidentally (low battery), results are saved automatically and systematically presented to the user before the launch of a new measure.

**Relative illuminance**

**Principle :**


To find the contribution on measurement result by the contribution or removal of a light source, LX100 instrument allows a relative measurement from an existing situation.

For example: knowing the impact of deleting or adding a lighting (neon tubes) in a room.

**Proceed as follows :**

From the start screen, user accesses to the measurement of the illumination **Rel**

1 x **Inst** then 1 x **Moy** : access to the screen. The function is not yet launched.

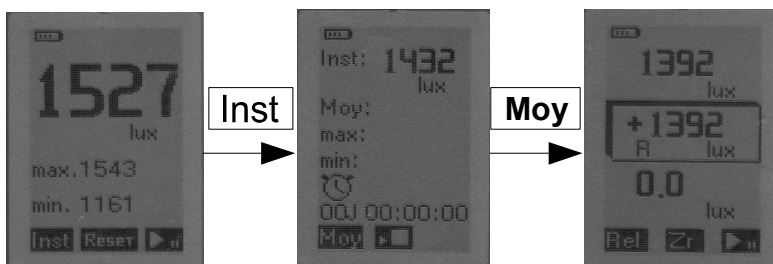


Value displayed at the top of the screen represents instantaneous illuminance

1x **Zr** : Press Zr key – screen shows:

• **Down** : the instantaneous value of illuminance (598.9 lux here), it will serve as reference. It remains fixed and stored.


• **At the top** : the value of fluctuating instantaneous illuminance (1268 lux here)

• **In the middle** : in the panel marked **R**, it is the difference between instantaneous value displayed at the top and reference value stored down. This value can be positive or negative according to fluctuations of illuminance compared to the moment of memorization of the reference value ( **Zr** key )



Example 1

Fluctuating instantaneous illuminance  
Relative illuminance  
Reference illuminance




Example 2

Fluctuating instantaneous illuminance  
Relative illuminance  
Reference illuminance

## VI – Running informations

### Over-range



Under conditions of measuring range excess, defined at 150,000 lux, an over-range pictogram appears. It comes fleetingly for an illuminance exceeding 150 000 lux . Displayed value will be 150.1 klux.

### Power source



When the instrument is equipped with alkaline batteries, it can operate for **72 hours minimum**. A symbol informs the user about electric power remaining. If battery is low, less than 1 bar on the pictogram, the instrument stops measuring, saves current measurement and switches off.

## VII – Maintenance

### Servicing

The LX 100 conception allows a reduced maintenance, which consists in changing batteries and cleaning the instrument and sensor with a slightly dampened cloth. A particular attention must be paid to the white disc covering the silicon photodiode which surface must not have dirt or scratches

### Regular checking

Like most measuring instruments, it is strongly recommended to regularly control and calibrate **LX100** instrument. The sensor sensitivity decreases depending on measurement durations and illuminance intensity. Return to the manufacturer each year will provide necessary metrological traceability.

### Batteries replacement – adaptors

#### Batteries :

To replace batteries, open the back hatch and insert the 3 new batteries of type 1.5 V / AAA-LR3 inside.

**Warning :** respect meaning of batteries. If storage is very long, remove batteries.

#### Adaptor :

If necessary for a long period of measurement, use a USB adaptor .

**Note:** when using with an external power, it is recommended to remove batteries from LX100. An internal protection, however, allows to secure all if you forget it.

## VIII – Main specifications

### Range details

lx value	Display	Unit	lux resolution	Minimum accuracy of calculation
0 to 10	0.1 to 10.0	lx	0.1	0.1 lux
10 to 99	10.0 to 99.9	lx	0.1	1%
100 to 999	100.0 to 999.9	lx	0.1	1%
1000 to 999	1000 to 9999	lx	1	1%
10000 to 99999	10.00 to 99.99	klx	10	1%
100000 to 150000	100.0 to 150.0	klx	100	1%
fc value	Display	Unit	fc resolution	Minimum accuracy of calculation
0 to 1	0.00 to 1.00	fc	0.01	0.01 fc
1 to 99	1.00 to 99.99	fc	0.01	1%
100 to 999	100.0 to 999.9	fc	0.1	1%
1000 to 9999	1000 to 9999	fc	1	1%
10000 to 13940	10.00 to 13.94	kfc	10	1%

### Specifications

**Measuring range**.....from 0,1 to 150 000 Lux  
 from 0.01 to 13940 fc  
**Spectral response**.....as per standard photopic curve  
 V(λ) NF C 42 -710 class C.  
**Error limit V(λ) (f1)** .....< 10%  
**True cosine evaluation (f2)**.....< 6%  
**Linearity (f3)**.....< 3%  
**Measurement capability**.....3 days – 03D00H00M  
**Display**.....Backlit LCD graphic 128x64.  
**Working temperature**.....from 0°C to +50°C  
**Storage temperature**.....from 0°C to +50°C  
**Housing dimensions (without sensor)**....120x58x34 mm  
**Weight (housing+sensor+battery)**.....185 gr  
**Digital electronic**.....low drift  
**Mini-USB plug**.....for USB power supply adaptor  
**Power supply**.....3 batteries 1.5V type LR3-AAA  
**Battery life**.....72 hours min, continuous operation.  
**Electromagnetic compatibility**.....according to 89/336/CEE  
**Conformity**.....as per RoHS


### Standard reference

This instrument is based on recommendations and requirements of the NF C 42-710 standard, February 1988, C class

## IX – Metrology

### Traceability

Calibration of this instrument was performed to determine calibration coefficient with a standard luxmeter measured under controlled lighting, usually an illuminant type A according to the CIE. The calibration coefficient expressed in percentage is filled. A calibration certificate is provided with the instrument.




Traceability


### Calibration

Reserved for the manufacturer or laboratory partner, proceed as follows:

From the main screen of measurement, after 2 successive pushes on .

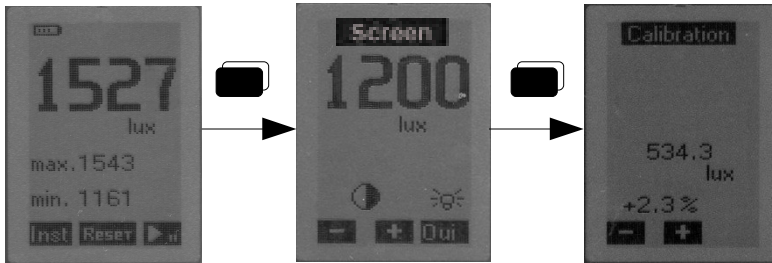

Screen indicates the illuminance value of the reference source measured by **LX100** instrument (534.3 lux here). If this value is correct, do nothing and exit calibration function pressing or key .




Calibration

If this value does not correspond either to the known value of the source of calibration bench or to the one measured by the standard of comparison, proceeds as follow :


Modify its value by successive pressing on or key. A last press is imperative on the **Val** key to finalize the calibration coefficient recording (+2.5% here).

Setting is limited to an excursion of +/- 10%.

**Beyond consult the service after sale.**



Calibration adjustment



Calibration validation

**Remember** : to avoid any unwanted manipulation and from the first press on a or function key, an alert appears : **Caution! Modification.**

Exit calibration function if necessary trough or

## X – Delivery and packaging

- **LX100** housing with silicon photodiode sensor and glass filter correction.
- Transport case
- 3 batteries LR3-AAA
- Calibration certificate
- **LX100** user manual