



FORCE/3 HP & HP2

Intec Part # K30000 HP; K30000 HP2

Insulation Blowing Machine

Redesigned for enhanced value | HP = 1 blower; HP2 = 2 blowers for more power

Durable & Dependable

Direct drive transmission, automatic chain tensioner, and industry exclusive long lasting urethane airlock seals enhance the system's reliability to deliver years of trouble-free service.

Ease of Use

Built in handle & wheels, and nimble weight balance provide ultimate portability into your truck, trailer, and jobsite -- including thru standard door openings. Simple to operate control panel and wired remote provide for ease of operation from either the unit or remotely.

Versatile

Install cellulose, fiberglass, or stonewool in attics, damp spray, dense pack, drill & fill, and net & blow applications.

High Production Rates

20 minute install of R-19 cellulose, fiberglass or stonewool in a 1000 square foot attic is made possible by its high production rates.

Intec's **FORCE/3** comes with these industry leading components on which it has built its reputation for durability and reliability:

- ✓ **Urethane seals:** last 2-3X longer than belted rubber providing higher pressures & increased production rates over longer periods of time with less maintenance.
- ✓ **Stainless steel airlock plates:** provide long wear life vs. industry standard airlock construction.
- ✓ **Direct-drive transmission:** fewer moving parts provides longevity with little maintenance.

integrity

excellence

innovation

trust



GOWIRELESS
Intec's Long Range
Wireless Transmission
optional

	bags/hr	lbs/min	lbs/hr
Cellulose	88	37	2200
Fiberglass	28	15	900
Stonewool	68	34	2050

Note: FORCE/3 HP testing per ASTM C519 standards.

FORCE/3 HP & HP2



800-666-1611

www.inteccorp.com

Click pictures
for website link

Rev: 20180104

VORTEC Intec's Professional Grade Equipment
Engineered for High Productivity Built-to-Last for High Value Generation



FORCE

Insulation Blowing Machines



Specifications



- Weight: HP = 335lbs (153kg), HP2 = 350lbs (159kg)
- Transmission: Durable worm gear direct drive
- Hose outlet: 3 inches (7.6cm)
- Electrical: 115VAC
 - 2 - 15amp circuits with FORCE/3 HP
 - 3 - 15amp circuits with FORCE/3 HP2
- Blower(s): 115 VAC – 15 amp, 2-stage generate high pressure and airflow.
- Agitator motor: 1-½ HP 115VAC-15amp input
- Hopper: 11-½ cubic feet
 - 1 bag cellulose; ½ bag fiberglass
- Warranty: 1 year, limited

Machine Features

- ✓ 100' Wired Remote with heavy duty cord standard with *Intec Exclusive* impact resistant Urethane head. 150' optional. 
- ✓ GOWIRELESS – optional Long Range Transmission wireless system with four placement options
 -  Jacket for Wrist or Hose
 -  Lanyard
 -  Belt Clip
 -  Belt Clip
- ✓ Variable Speed High Powered Blower 
- ✓ Quick setting gate 
- ✓ Urethane airlock seals last 2-3X longer than belted rubber -- providing higher pressures & production rates over time with less maintenance. 
- ✓ Quick clean blower filter 
- ✓ Stainless steel airlock plates provide long wear life vs. industry standard airlock construction. 
- ✓ Large Hopper
- ✓ Direct-drive transmission: fewer moving parts provides longevity with little maintenance.

**Backed by Intec's industry leading Technical Service.
Training & Accessories are available to increase your efficiencies.**

Professional Grade – Heavy Duty Capabilities



Dense Pack



Blow Behind Netting



Spray On



Attics


Maximize your

Return On Investment



With Intec blowing machines

Distributed by

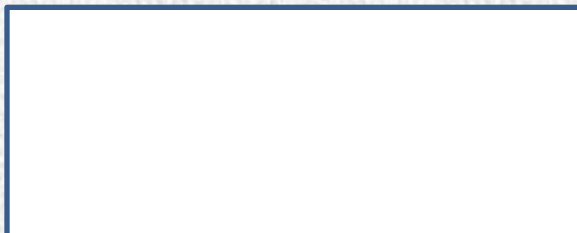

Manufactured by

Insulation Technology Corporation, d.b.a. Intec
4040 Kodiak Court
Frederick, CO 80504

1-800-666-1611
www.inteccorp.com

Local: 303-833-6644
Fax: 303-833-6650
sales@inteccorp.com

Click pictures for website link 



... it's the 'tec' inside that counts!