

Miller Grip Portable/Reusable Anchorage Connectors

Models: 496 and 497

Description

The Miller Grip 496 and 497 portable/reusable anchorage connectors are designed for use in a fully-cured concrete hole with minimum compression strength of 3,000 psi.

Materials

- 1. **Spoon Wedges:** Stainless Steel
- 2. **End Fitting:** Stainless Steel
- 3. **Cleaning Bushing:** Stainless Steel
- 4. **Stop Sleeve:** Stainless Steel
- 5. **Main Cable:** 7x19 Galvanized
- 6. **Return Wire:** 1x19 Galvanized
- 7. **Thimble:**
 - 496: Polyurethane
 - 497: Steel w/Green Powder Coat
- 8. **Trigger:** Aluminum
- 9. **Spring:** Zinc-plated Spring Steel
- 10. **Swage:** Zinc Coated Copper
- 11. **Wire Guide:** Polyurethane

*All hardware meets ASTM (50) fifty-hour salt spray test requirements.

Technical

Max Working Load:

496 & 497 400 lbs (181kg)

Certification


Meets ANSI A10.32, Z359.1 and OSHA 1926.502 requirements



497 Grip Application



496 Grip Application

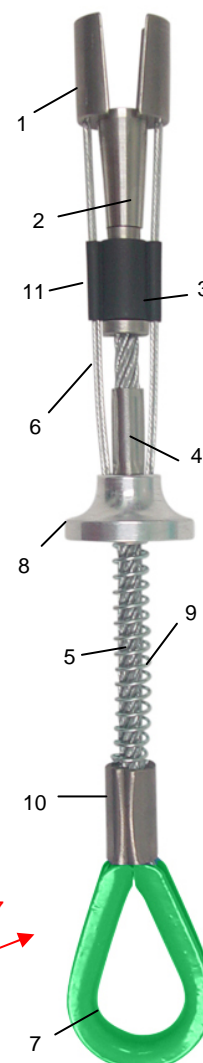

Model: 497
Shown

Model	Hole Diameter	Weights	Description
496	3/4" (19mm)	0.45lbs (0.20kg)	5,000 lb. (2,268kg) ultimate strength; for single user connection; 400 lbs. (181.4kg) maximum capacity
497	1" (25mm)	1.15lbs (0.53kg)	10,000 lb. (4,536kg) ultimate strength; for single user connection; 400 lbs. (181.4kg) maximum capacity



by Honeywell

Toll Free 800.873.5242 (press 4) • hsptechsupport@honeywell.com • www.millerfallprotection.com

WARNING! THIS DOCUMENT PROVIDES AN OVERVIEW OF FALL PROTECTION PRODUCTS AVAILABLE FROM HONEYWELL AND CARE HAS BEEN TAKEN TO ASSURE THE ACCURACY OF THE DATA. IT DOES NOT PROVIDE IMPORTANT PRODUCT WARNINGS AND INSTRUCTIONS. HONEYWELL RECOMMENDS ALL USERS OF FALL PROTECTION EQUIPMENT UNDERGO THOROUGH TRAINING, AND THAT ALL WARNINGS AND INSTRUCTIONS PROVIDED WITH THE PRODUCTS BE THOROUGHLY READ AND UNDERSTOOD PRIOR TO EACH USE. FAILURE TO READ AND FOLLOW ALL PRODUCT WARNINGS AND INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH.