

Elavation™ 7510

Technical Data Sheet



Elavation 7510 Full Body Harness


Elavation 7510 Full Body Harnesses are designed for users with a maximum capacity up to 400 pounds (181 kg) including clothing, tools, etc.


All components of the Elavation 7510 Full Body Harness meet the ANSI Z359.1-2007 standard and OSHA 29 CFR 1910.66 and 1926.502 requirements.





7510Q (S-M)


Attachment Points

- 

A The dorsal (back) D-ring affixed to all 3M Full Body Harnesses is for fall arrest or restraint systems. The dorsal D-ring may also be used for rescue applications.
- 

L A front D-ring is used for fall arrest in vertical systems that limit the free fall distance to 18 inches. The front D-ring may be used for restraint, and ladder climbing systems.
- 

D The seat strap D-rings are to be used for rescue, and controlled descent applications. The front D-ring may also be used for rescue, and controlled descent.
- 

E Shoulder D-rings may be used in rescue applications. Always use both shoulder D-rings simultaneously, utilizing the 3M M30-SBA Spreader Bar Assembly. **The shoulder D-rings are not for fall arrest or climbing applications.**
- 

P Hip D-rings are used for positioning and restraint systems. Always use both hip D-ring connections when securing work positioning devices. **Hip D-rings are not for fall arrest or climbing applications.**

⚠ WARNING

Compliant fall protection and emergency rescue systems help prevent serious injury during fall arrest. Users must read and understand the User Instructions provided with the product and be properly trained by their employer prior to use per OSHA 29 CFR 1910.66 and 1926.503 or applicable local standards. **Misuse or failure to follow warnings and instructions may result in serious personal injury or death.**

[3m 7510eq Elevation Safety Harness Fall Protection S M](#)

[3m 7510eq Elevation Safety Harness Fall Protection L Xl](#)

[3m 7510eq Elevation Safety Harness Fall Protection Xxl](#)

[3m 7510feq Elevation Safety Harness Fall Protection S M](#)

[3m 7510feq Elevation Safety Harness Fall Protection L Xl](#)

[3m 7510feq Elevation Safety Harness Fall Protection Xxl](#)

[3m 7510fq Elevation Safety Harness Fall Protection S M](#)

[3m 7510fq Elevation Safety Harness Fall Protection L Xl](#)

[3m 7510fq Elevation Safety Harness Fall Protection Xxl](#)

[3m 7510q Elevation Safety Harness Fall Protection S M](#)

[3m 7510q Elevation Safety Harness Fall Protection L Xl](#)

[3m 7510q Elevation Safety Harness Fall Protection Xxl](#)

Elevation™ 7510

Technical Data Sheet




| Model 3M ID | Webbing Material | D-Rings | D-Ring Material | Leg Connection | Chest Connection | Capacity | CSA Class | Weight | Compliance Standards |
|------------------------------------|---------------------|---------------------------------|--------------------|-------------------|---------------------|---------------------|--------------|---------------------|----------------------------------|
| 7510EQ (S-M) 70071604659 | Polyester | Back, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510EQ (S-M)-LOGO 70071604667 | Polyester | Back, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510EQ (L-XL) 70071604634 | Polyester | Back, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510EQ (L-XL)-LOGO 70071604642 | Polyester | Back, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510EQ-XXL 70071604675 | Polyester | Back, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510EQ-XXL-LOGO 70071604683 | Polyester | Back, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FEQ (S-M) 70071605326 | Polyester | Back, Front, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FEQ (S-M)-LOGO 70071605334 | Polyester | Back, Front, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FEQ (L-XL) 70071605300 | Polyester | Back, Front, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FEQ (L-XL)-LOGO 70071605318 | Polyester | Back, Front, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FEQ-XXL 70071605342 | Polyester | Back, Front, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FEQ-XXL-LOGO 70071605359 | Polyester | Back, Front, Extended Back D | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FQ (S-M) 70071604410 | Polyester | Back, Front | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FQ (S-M)-LOGO 70071604428 | Polyester | Back, Front | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FQ (L-XL) 70071604394 | Polyester | Back, Front | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FQ (L-XL)-LOGO 70071604402 | Polyester | Back, Front | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FQ-XXL 70071604436 | Polyester | Back, Front | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510FQ-XXL-LOGO 70071604444 | Polyester | Back, Front | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A, L | | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510Q (S-M) 70071603602 | Polyester | Back | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | 4.6 lbs (2.1 kg) | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510Q (S-M)-LOGO 70071603610 | Polyester | Back | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | 4.6 lbs (2.1 kg) | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510Q (L-XL) 70071603586 | Polyester | Back | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | 4.7 lbs (2.1 kg) | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510Q (L-XL)-LOGO 70071603594 | Polyester | Back | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | 4.7 lbs (2.1 kg) | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510Q-XXL 70071603628 | Polyester | Back | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | 4.9 lbs (2.2 kg) | ANSI Z359.1-07 CSA Z259.10-06 |
| 7510Q-XXL-LOGO 70071603636 | Polyester | Back | Forged Steel | Quick Connect | Quick Connect | 400 lbs (181 kg) | A | 4.9 lbs (2.2 kg) | ANSI Z359.1-07 CSA Z259.10-06 |

F = Front D-Ring; E = Back D-Ring Extender; Q = Quick Connect; LOGO = Option to add custom logo; Weights and measurements are approximate.

Elevation™ 7510

Technical Data Sheet

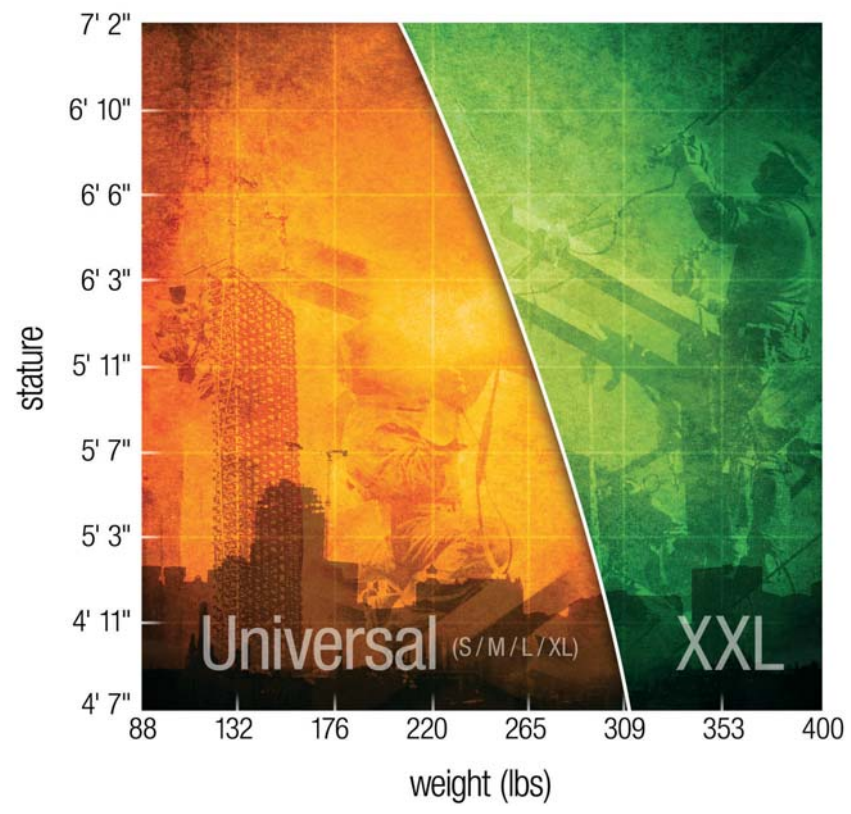

Product Warranty, Limited Remedy, and Limitation of Liability

WARRANTY: THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Equipment offered by 3M is warranted against factory defects in workmanship and materials for a period of one year from date of installation or first use by the original owner.

LIMITED REMEDY: Upon notice in writing, 3M will repair or replace all defective items at 3M's sole discretion. 3M reserves the right to require that the defective item be returned to its plant for inspection before determining the appropriate course of action. Warranty does not cover equipment damage resulting from wear, abuse, damage in transit, failure to maintain the product or other damage beyond the control of 3M. 3M shall be the sole judge of product condition and warranty options. This warranty applies only to original purchaser and is the only warranty applicable to this product.

LIMITATION OF LIABILITY: IN NO EVENT WILL 3M BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OF PROFITS, IN ANY WAY RELATED TO THE PRODUCTS REGARDLESS OF THE LEGAL THEORY ASSERTED.